

R015 690V

($\phi 10 \times 38$)mm



Specifications

Rated voltage: 690V

Rated current: 32A

Standard

IEC60269-6

Typical application

- General industrial application
- Motor drive
- LV networks
- Electric cabinet
- Solid state relays
- Semiconductor devices
- Power rectifier
- Uninterruptible Power System


Product features

- 2A to 32A ampere ratings available
- Full range protection, semiconductor protection and motor protection
- Standardized Cylindrical Construction
- Low power dissipation performance for lower temperature rise
- Din Rail mounting

Product parameters

Product code	Rated current	Breaking capacity
R015	2A~32A	80kA

Product size (mm)

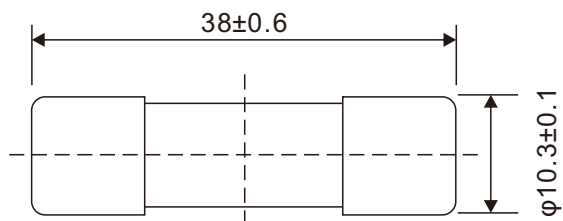

Time-current curve

