

## RT18-32X 690V

Fit for (φ10x38)mm Fuse link



### ■ Specifications

Rated voltage: 690V  
Rated current: 32A

### ■ Standard

IEC60269-6

### ■ Typical application

- General industrial application
- Motor drive
- LV networks
- Electric cabinet
- Solid state relays
- Semiconductor devices
- Power rectifier
- Uninterruptible Power System


### ■ Product features

- 2A to 32A ampere ratings available
- Full range protection, semiconductor protection and motor protection
- Standardized Cylindrical Construction
- Low power dissipation performance for lower temperature rise
- Din Rail mounting


## Product parameters

Product code	Rated current	Breaking capacity
RT18-32X	32A	80KA

## Product size (mm)

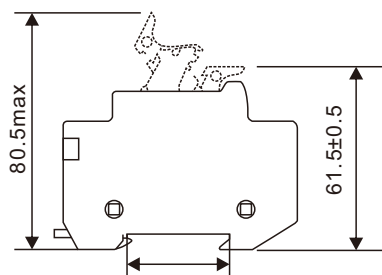

Equipped with TH35-7.5 mounting rail



THPV-30(X)

Note: This base can provide 1P, 2P, 3P, 4P for selection