

THPV-30 1000Vdc

Fit for (φ10.3x38)mm Fuse link

■ **Specifications**

Rated voltage: 1000Vdc

Rated current: 30A

■ **Standard**

IEC60269-6

■ **Typical application**

PV combiner box

■ **Product features**

Imported nylon material, V0 flame retardant, high and low temperature resistance


≥24h salt spray test, resistance to acid environment

Silver-plated copper terminal blocks, low temperature use


Product parameters

Product code	Rated current	Breaking capacity	Safety certificate	Fitted with fuse-link model size	Net weight
			CE		
THPV-30X	30A	1000Vdc	•	THPV-30 (S) (φ10.3x38)mm	61.5g

Note: • DENOTES FOR CERTIFICATION APPROVED

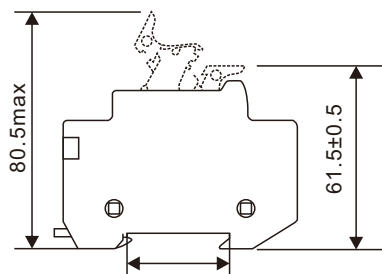Product size (mm)


Equipped with TH35-7.5 mounting rail



THPV-30(X)

Note: This base can provide 1P, 2P, 3P, 4P for selection

PV power distribution network

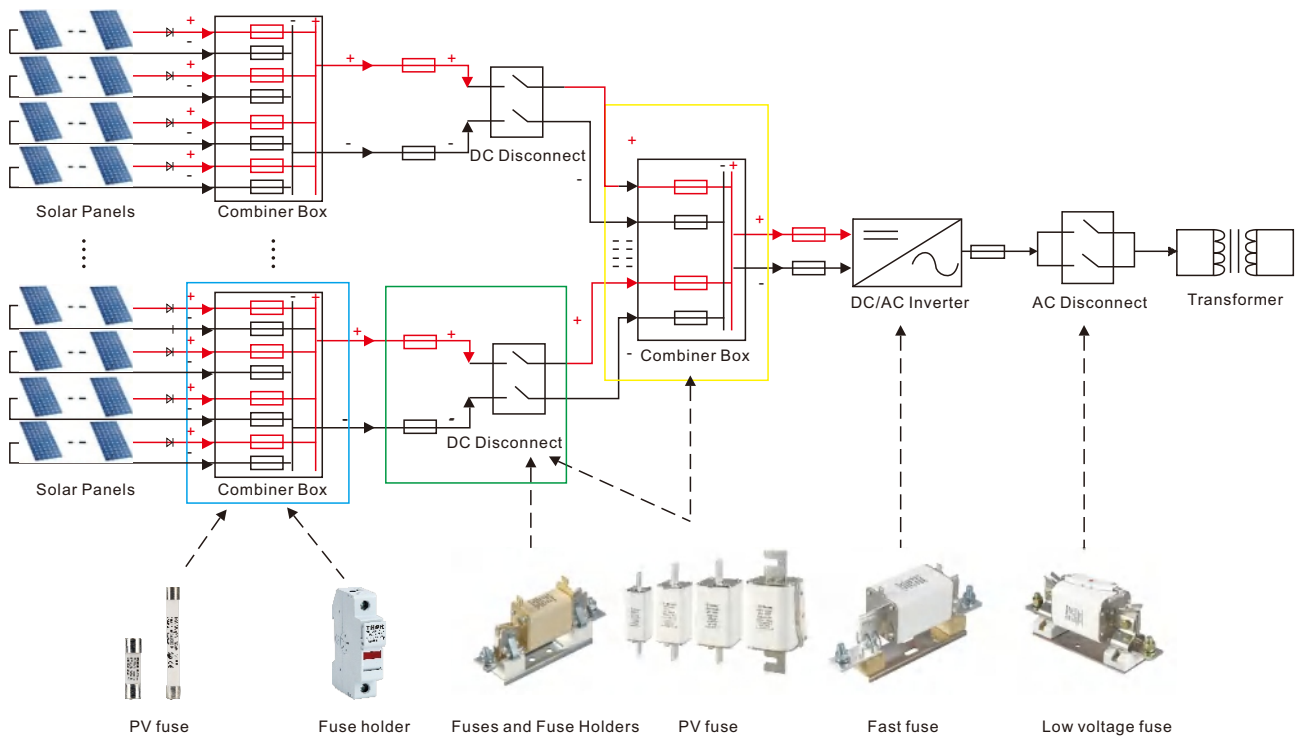

shape	size	Fuse Mounting Type	Product number	Rated current	Rated voltage
cylindrical cap	φ10.3x38mm	TH35-7.5	THPV-30(S)	2、3、4、5、6、8、10、 12、15、20、25、30	1000Vdc/1500Vdc
		Bolted			
		Printed circuit board (pins)			
Square tube knife	1	Knife contact	THPV-250	80、100、125、160、 200、250	
		Bolted			